



HUBER Pumping Stations Screen ROTAMAT® RoK4

Automatically cleaned fine screen with vertical lifting,
dewatering and compaction of screenings

- ▶ Prevents clogging and tressing in the pumping station
- ▶ Compact unit, easy to fit into confined spaces
- ▶ Integrated bottom step to prevent sedimentation
- ▶ Optional frost-protected unit for outdoor operation
- ▶ Sturdy, low-maintenance stainless steel design

More information,
downloads and
current news



Situation

Pumps and lifting units are used where wastewater needs to be lifted to a higher level so that it can be passed further on by gravity. However, the solids contained within the wastewater frequently lead to pump failure. Labour-intensive manual cleaning is required to restore the function of the units, or they need to be replaced. This causes high costs in the long term. Reliable solids removal is therefore the only alternative to maintain the operating stability of the pumps.

Solution

The HUBER Pumping Stations Screen ROTAMAT® RoK4 is the ideal solution for this task, whether for new structures or refurbishment. Contrary to conventional screening systems which require manual cleaning, the screen surface of the HUBER Pumping Stations Screen ROTAMAT® RoK4 is cleaned automatically. The screen vertically lifts the screenings, and dewateres and compacts them at the same time. Screenings can then be disposed of in a container provided for downstream disposal. Consequently, pump failures are a thing of the past.

Function


The screen consists of a vertical perforated screen basket and a shafted auger in a vertical tube. The wastewater flows through an inflow connection and a chamber into the screen basket. Within the screen basket the flights of the screw are equipped with wear-resistant brushes for effective cleaning of the screen. As the screenings are gradually elevated by the auger, they are dewatered.

The compacted screenings are discharged into a container or endless bagger thus eliminating odour nuisance. The screened wastewater flows off by gravity or is pumped to a higher level.

The top of the lateral inflow chamber is open and serves as an emergency bypass so that the machine can be submerged without problems, e.g. in case of a power failure. The integrated bottom step prevents back-flooding into the sewer system and thus undesired deposits in the incoming sewer.



Clogged pumps caused by the solids within the medium to be delivered.

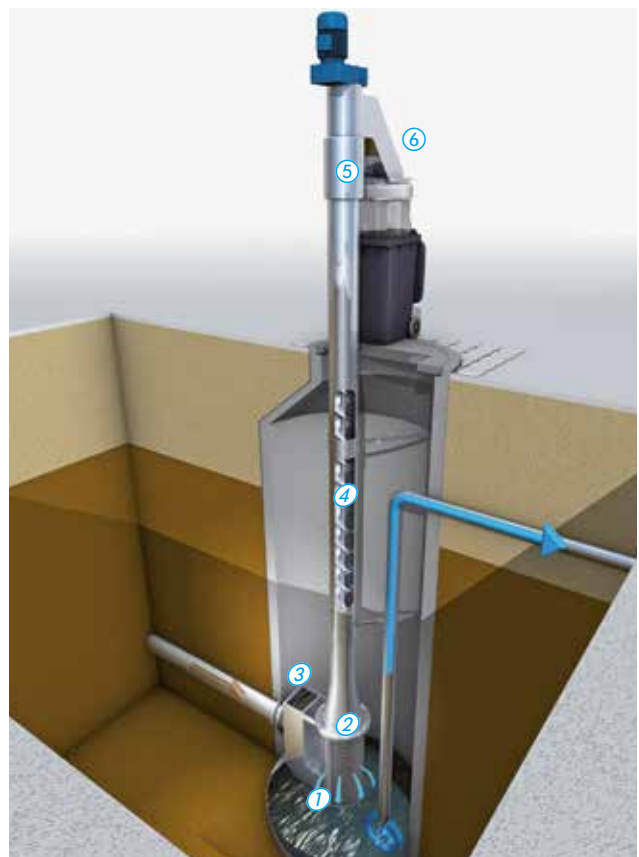

- ① Inflow unit with integrated invert step
- ② Screen basket
- ③ Emergency overflow
- ④ Dewatering in vertical auger
- ⑤ Press zone for compacting screenings to up to 40 % DS
- ⑥ Discharge chute with endless bagging device

Installation situation

The HUBER Pumping Stations Screen ROTAMAT® RoK4 is directly connected to the sewer pipe by means of a flanged joint. The wastewater enters the screen through the optimized inflow chamber with integrated bottom step. As the water streams through the perforated plate into the pump sump, the screenings are retained. An auger, with a brush attached on its flights, rotates within the screen basket and cleans the screen. As the screenings are elevated by the auger, they are dewatered to a degree of up to 40 %. The compacted screenings are discharged into a container. As an option, the RoK4 is available as a pull screen that allows the screen to be lifted out of the structure, for maintenance purposes for example.

Applications

HUBER Pumping Stations Screen ROTAMAT® RoK4 units are used for solids retention in the following applications for example:

- ▶ In pump stations
- ▶ Upstream of pond plants
- ▶ In the headworks of wastewater treatment plants



HUBER Pumping Stations Screen ROTAMAT® RoK4 being lifted into a pumping station.

The user's benefits

HUBER Pumping Stations Screen ROTAMAT® RoK4 units offer outstanding advantages:

- ▶ Automatic screening, lifting and compaction in a single compact unit
- ▶ Optimal solids retention by means of two-dimensional screening (perforated plate)
- ▶ Prevent clogging and tressing in pump stations and manholes
- ▶ Integrated bottom step to prevent deposits in the incoming sewer
- ▶ Easy to install into existing structures
- ▶ Availability of completely submerging the screen



HUBER Pumping Stations Screen ROTAMAT® RoK4 in operation.

Installation examples

A selection of installation examples will convince you of the HUBER Pumping Stations Screen ROTAMAT® RoK4.



Heated outdoor installation with endless bagging device for screenings disposal.



Installation upstream of a pond plant.



"Quick swing-out system" with cable pull for easy maintenance access outside a channel installation situation.



View of the screen basket in operation.

HUBER SE

Industriepark Erasbach A1 | 92334 Berching
Phone: +49 8462 201-0 | info@huber.de
www.huber.de

HUBER Pumping Stations Screen ROTAMAT® RoK4
Subject to technical modification | 0,1 / 15 – 2.2024 – 4.2004