

## Rigid window F1, designed to prevent thermal conduction



The figure shown here may contain special accessories.

**Frame window**, rigid, ready for installation, made from two-sheet special 1.4301 (AISI 304) stainless steel profile with intermediate special plastic core to prevent thermal conduction, thermally insulated according to EN 10077,  $U_f = 2.70 \text{ W}/(\text{m}^2\cdot\text{K})$ . Glazing bead invisibly fastened.

**Frame**, designed for dowelling into window soffit, including fixing material.

Machine ground **surface finish**.

**Dry glazing** with insulation glass, without KTW approval

### Options:

- ▶ 1.4404 (AISI 316 L) stainless steel
- ▶ Secure to prevent forced access according to DIN EN 1627, RC3 (only possible with wet glazing)
- ▶ Special glazing (e.g. security glass)
- ▶ Multi-wing window
- ▶ Outside window sill made from stainless steel
- ▶ Water chamber window, with drain holes towards the dry side, wet glazing KTW approved
- ▶ Other designs available on request




Rigid window F1, designed to prevent thermal conduction


Subject to technical modification | Drawing no. 190.476, 5.2022

HUBER SE | Industriepark Erasbach A1 | D-92334 Berching | Telefon: +49 8462 201-0 | info@huber.de | [www.huber.de](http://www.huber.de)

Ansicht / view

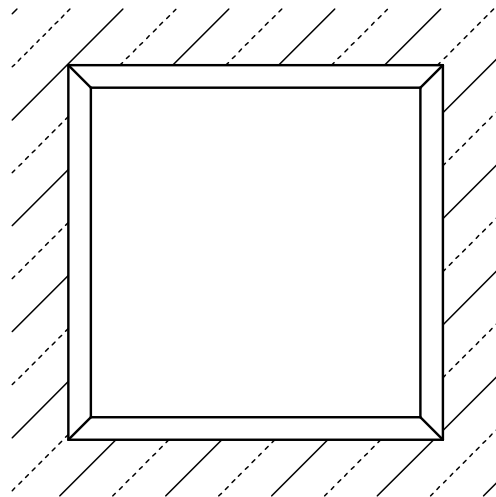

Schnitt / section

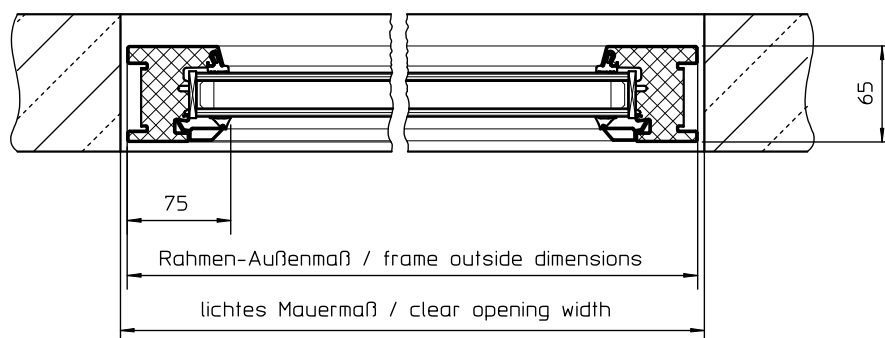

Frame window	Clear wall opening w / h	Maximum wing weight	Aspect ratio w / h
Typ F1	one-wing: w = 415–1124 / h = 400–744	130 kg	max. 1:0,75
	one-wing: w = 415–1324 / h = 745–924		
	one-wing: w = 415–1524 / h = 925–2524		

Available dimensions. All measurements in mm.



Rigid window F1, designed to prevent thermal conduction

Subject to technical modification | Drawing no. 190.476, 5.2022

HUBER SE | Industriepark Erasbach A1 | D-92334 Berching | Telefon: +49 8462 201-0 | info@huber.de | [www.huber.de](http://www.huber.de)