

Rigid Security Ventilating Louvre for external face of the wall TT2.JW, Adjustable Louvre for internal face of the wall TT10.B



Universally applicable for controlled ventilation of buildings, especially in the field of potable water supply, and for plants with increased security requirements.

A) Rigid safety louvre TT2.JW (for external face of the wall), attack proof, ready for installation, of rigid all welded construction, completely made from 1.4307 (AISI 304 L) stainless steel.

Frame, made from Z profile, 3 mm thick, designed for internal bolted fixing, with access to the anchors only from the interior wall surface.

Slats, 3 mm thick, rigidly welded, with the slats staggered so that penetration is impossible even with moveable hoses. With 1 x 1 mm fly screen on the inside.

Both frame and slats are shielded arc-welded and acid bath cleaned before washing, drying and surface passivation.

Options:

- ▶ 1.4404 (AISI 316 L) stainless steel
- ▶ Lacquered on the outside
- ▶ Ground surface finish
- ▶ Additional internal frame with removable fine filter for dust and pollen, held by wing nuts
- ▶ Fixing material

B) Adjustable louvre TT10.B (for internal face of the wall), ready for installation, 1.4307 (AISI 304 L) stainless steel.

Frame, made from angle section with boreholes for bolted fixing.

Slats, adjustable, overlapping when closed, with chain pull lockable in any position.

Both frame and slats are shielded arc-welded and acid bath cleaned before washing, drying and surface passivation.


Options:

- ▶ 1.4404 (AISI 316 L) stainless steel
- ▶ Fixing material




The figure shown here may contain special accessories.




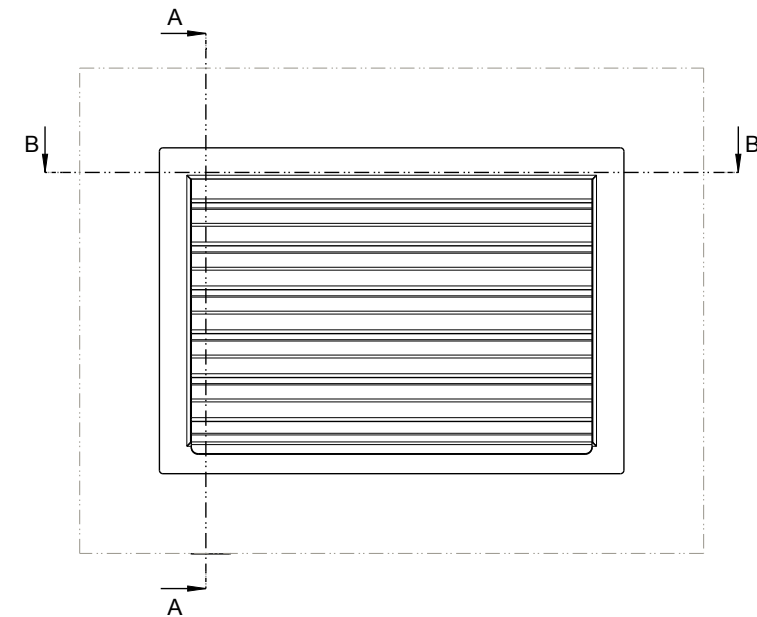

B-B Jalousie beweglich (Wandinnenseite) / adjustable louvre (for internal face to the wall)

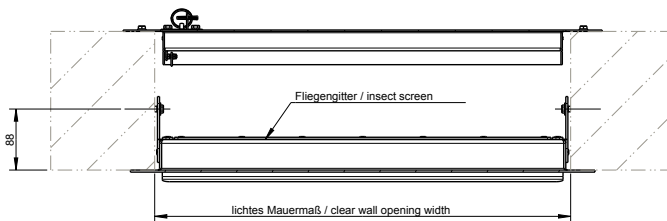

Sicherheitsjalousie starr (Wandaussenseite) / rigid safety louvre (for external face of the wall)

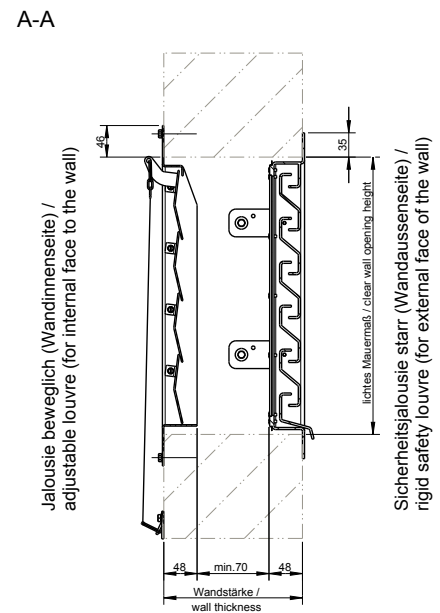

Jalousie beweglich (Wandinnenseite) / adjustable louvre (for internal face to the wall)

Sicherheitsjalousie starr (Wandaussenseite) / rigid safety louvre (for external face of the wall)

Nominal size order no.	Clear wall opening	Wall flange diameter w / h	For wall thickness w / h
0400/0200 JW	rigid	400 / 200	385 / 185
0500/0300 JW	rigid	500 / 300	485 / 285
0600/0400 JW	rigid	600 / 400	585 / 385
0800/0400 JW	rigid	800 / 400	785 / 385
1000/0400 JW	rigid	1000 / 400	985 / 385
1000/0600 JW	rigid	1000 / 600	985 / 585
0400/0200 JB	moveable	400 / 200	376 / 176
0500/0300 JB	moveable	500 / 300	476 / 276
0600/0400 JB	moveable	600 / 400	576 / 376
0800/0400 JB	moveable	800 / 400	776 / 376
1000/0400 JB	moveable	1000 / 400	976 / 376
1000/0600 JB	moveable	1000 / 600	976 / 576

Ask for further dimensions. All measurements in mm.



Rigid Security Ventilating Louvre for external face of the wall TT2.JW, Adjustable Louvre for internal face of the wall TT10.B
Subject to technical modification | Drawing no. 50991834, 5.2022