

## Data Request Sheet for Doors TT5

Project: \_\_\_\_\_

Customer: \_\_\_\_\_

Customer no.: \_\_\_\_\_

Person in charge: \_\_\_\_\_

Phone: \_\_\_\_\_ E-mail: \_\_\_\_\_

☐ Offer Offer no.: \_\_\_\_\_ Unit price \_\_\_\_\_ €,

☐ Order Order no.: \_\_\_\_\_ Internal base price per unit \_\_\_\_\_ €, Item: \_\_\_\_\_, **P** \_\_\_\_\_

Below you will find our door questionnaire (consisting of four sheets) for the above property. We kindly ask you to fill in the door questionnaire **completely**, confirm the information under point 11 with your signature and return it to us. We would like to point out that the information you provide is a binding part of the contract for the manufacture of the door. The delivery time stated by us begins after the **fully completed** door questionnaire has been returned. **Requested special equipment that is not included in the offer price will only be carried out against payment.**

**Chlorine room door**, completely made from 1.4404 (AISI 316 L) stainless steel, **single door** according to sheet TT5, door inside lacquered in RAL 9006, including supply of the associated mounting material.


### Customer provided locking system

☐ mechanical

☐ digital (*Digi*) manufacturer: ..... typ: .....  
(anti-panic function required, pulling protection)

### 1. Shell dimensions:

(Drawing 1)

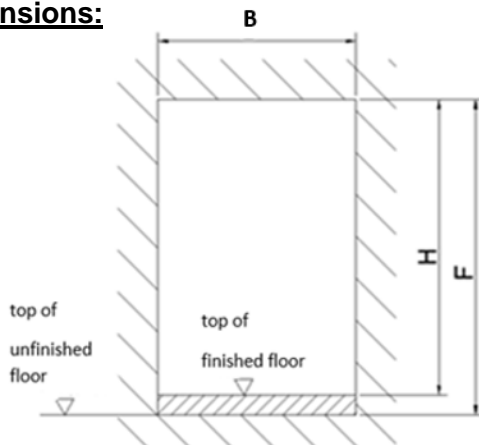


Clear width B = \_\_\_\_\_ mm

Clear wall opening F = \_\_\_\_\_ mm


Clear height H = \_\_\_\_\_ mm

## 2. Installation situation:

- ☐ Installation into the lintel  
(Z-frame and block frame possible)  
(Drawing 2 a)

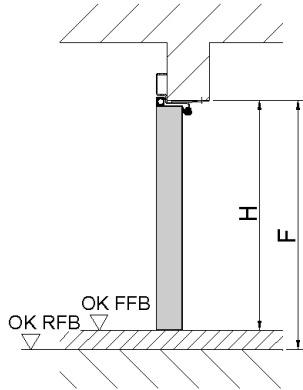


- ☐ Installation into ceiling-high clearance  
(Only block frame possible!)  
(Drawing 2 b)

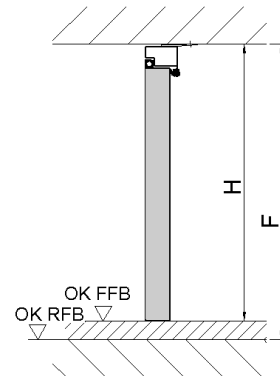

## 3. Sill closure:


### 3.1 Standard sill closure:

- ☐ step flashing / wall clamps  
(Drawing 3 b)

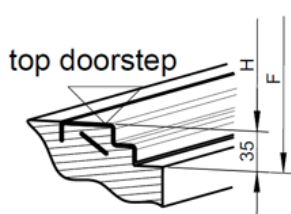


(BA1)

- ☐ step flashing / bolted with dowels  
(Drawing 3 g)

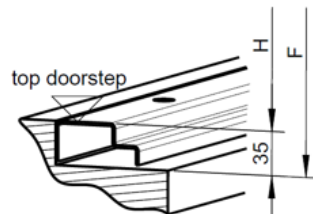

(BA2)


- ☐ non-standard sill, U-profile,  
sill height: ..... mm  
(minimal 20mm) (Drawing 3h)

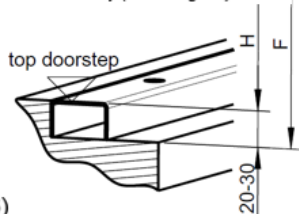

(BA6)


### 3.2 Special sill closure (surcharge):

- ☐ without step flashing,  
no test certificate, bolted  
with dowels (Drawing 3 f)

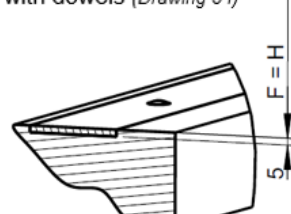


(BA3)

- ☐ circumferential block frame  
on four sides (Drawing 3i)

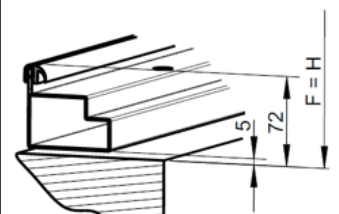

(BA4)


- ☐ circumferential Z-frame on  
four sides, **only RC3** (Drawing 3j)

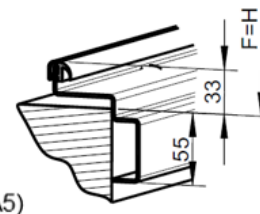


(BA5)

#### 4. Frame and mounting options:


- I.) ☐ Block frame bolted with dowelling clips  
(Drawing 4 b)

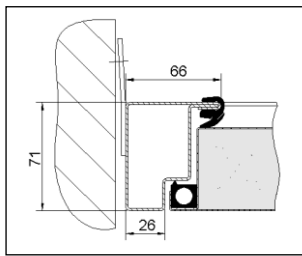


- II.) ☐ Block frame bolted through the frame, minimum edge distance 80 mm  
(Drawing 4 c)

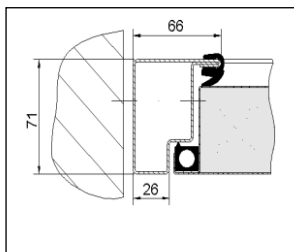

- III.) ☐ Z-frame bolted with dowelling clips  
(Drawing 4 e)

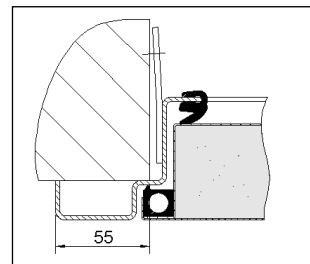


- IV.) ☐ Z-frame bolted through the frame  
(Drawing 4 f)

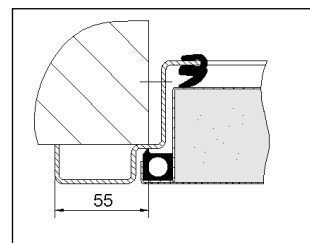


#### 5. Door opening options:

Single-leaved TT1.1

- ☐ hinges on left  
(Drawing 5 a)

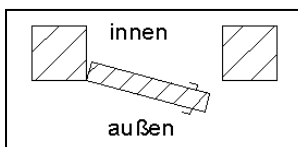


- ☐ hinges on right  
(Drawing 5 b)

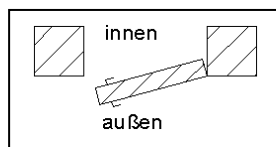


Double-leaved TT1.2 – position of hinges on swing leaf  
(as of 1350 mm the door leaf is divided)

- ☐ hinges on left  
(Drawing 5 c)

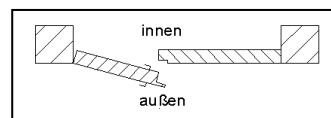

- ☐ hinges on right  
(Drawing 5 d)

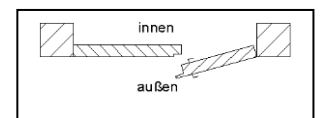

**Swing leaf**

\_\_\_\_\_ mm  
(min. 400 mm / max. 1500 mm)

**Fixable leaf**

\_\_\_\_\_ mm  
(min 300 mm / max. 1500 mm)

#### 6. Aeration

- ☐ With two aeration slits, W x H = 100 x 20 mm, (one in top door section, one in bottom door section), with insect screen
- ☐ Without aeration slits
- ☐ Installation of rigidly mounted louvres (at extra cost), these exceed maximum size (2 x 20 cm<sup>2</sup>), in accordance with German UVV standards

Size: W x H = 400 x 200 mm

W x H = 500 x 300 mm

**Louvre installation position:** 1 in the upper section

☐

inside fly grid only

☐

inside fly grid + movable louvre

☐

1 in the lower section

☐
☐
☐

**7. Optional equipment:**

- |  |   |   |
|--|---|---|
| <input type="checkbox"/> Upper door closer GEZE TS 5000 (door stopper required)                                    | <input type="checkbox"/> swing leaf $\geq 750$ mm width | <input type="checkbox"/> fixable leaf $\geq 750$ mm width |
| <input type="checkbox"/> Upper door stop manually releasable   | <input type="checkbox"/> swing leaf $\geq 750$ mm width | <input type="checkbox"/> fixable leaf $\geq 750$ mm width |
| <input type="checkbox"/> Lowerable floor seal  |   |   |
| <input type="checkbox"/> One-piece door arrestor (mounted to the door panel), 120 mm lift                          | <input type="checkbox"/> swing leaf                     | <input type="checkbox"/> fixable leaf                     |
| <input type="checkbox"/> Two-piece door arrestor/stop (supplied loose)   | <input type="checkbox"/> swing leaf                     | <input type="checkbox"/> fixable leaf                     |
| <input type="checkbox"/> Alarm wire insert   |   |   |
| <input type="checkbox"/> Magnetic contact (door OPEN/SHUT indicator)   | <input type="checkbox"/> swing leaf                     | <input type="checkbox"/> fixable leaf                     |
| <input type="checkbox"/> Lock-bolt contact (door OPEN/SHUT indicator)  |   |   |
| <input type="checkbox"/> Potential equalisation  | <input type="checkbox"/> on top of frame                | <input type="checkbox"/> on frame bottom                  |
| <input type="checkbox"/> Heating cable in door frame (without outside temperature sensor, without controls) (HEIZ) | <input type="checkbox"/> in door frame                  | <input type="checkbox"/> in door panel                    |
| <input type="checkbox"/> Block frame insulation  |   |   |
| <input type="checkbox"/> Paint RAL colour _____ (RAL...)   | <input type="checkbox"/> outside                        | <input type="checkbox"/> inside                           |
| <input type="checkbox"/> Additional anti-graffiti lacquer (RAL...)   | <input type="checkbox"/> outside                        | <input type="checkbox"/> inside                           |
| <input type="checkbox"/> Steel sheet finish  |   |   |
| <input type="checkbox"/> Wood panel, wood type: _____ (HOLZ)   | <input type="checkbox"/> outside                        | <input type="checkbox"/> inside                           |

**Info: In case of sunlight, the operability may be impaired. In these cases, we recommend a steel sheet finish or wood panel. (see special equipment).**

**8. Other accessories:**

**9. Delivery address** (complete with post code and city)

If the door is to be supplied directly onto a site, indicate the available unloading times and contact persons on site.

**10. Customer's confirmation:**

Customer's representative: \_\_\_\_\_ Date: \_\_\_\_\_ Signature: \_\_\_\_\_

**11. Please return this form to:**

HUBER contact person: \_\_\_\_\_ Phone. Nr. +498462/201- Fax. Nr. +498462/201-399

E-Mail: \_\_\_\_\_@huber.de

**Review:** Reviewed at HUBER SE by: \_\_\_\_\_

**12. Enclosures for the design engineers:**

- ☐ Drawing ☐ Photo ☐ .....